

2014

SEATS



STANDARD S855
OMP
MODEL: RYE CAR
HORROR. N° CS. 146.0
MONTH
YEAR

OMP

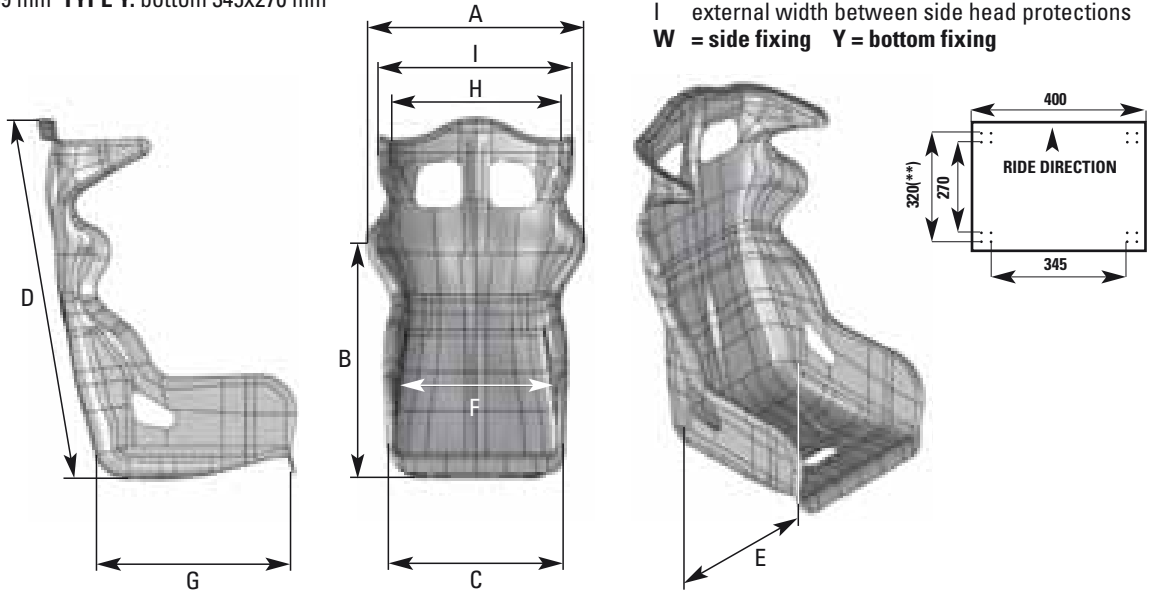
OMP

The following measurements are given as a guide.
 Actual measurements may vary to accommodate production.
 Seat fitting type: according to FIA regulations the seat must be fixed to the brackets by means of at least four bolts M8 class 8.8.
 The diagram shows the distances between the fixing points in mm.





* the weight refers to the complete seat (tolerance of 10%).
 ** referring to bottom fixing points of the sliding guide.
TYPE W: inner side int. 289 mm **TYPE Y:** bottom 345x270 mm

LEGEND

- A external max width at shoulders
 - B seat bottom to mid shoulders
 - C seat bottom max external width
 - D total height of seat back
 - E external max width of side bolsters
 - F seat inner width (belt holes area)
 - G bottom length
 - H internal width between side head protections
 - I external width between side head protections
- W = side fixing Y = bottom fixing**



HOMOLOG.	SHELL	AIRTEX® MATERIAL	CUSHIONS SPLIT LEG	A	B	C	D	E	F	G	H	I	HARNES SLOTS	WEIGHT* (KG)	FIXING	
HTE ONE E	HA/761E															
FIA 8862/2009	CARBON	✓	✓	625	620	490	890	380	365	480	365	500	5	9.9	W	
HRC-R CARBON AIR	HA/786															
FIA 8855/1999	CARBON	✓	✓	615	696	390	890	450	395	470	425	490	5	6,2	W	
HRC-R carbon	HA/788															
FIA 8855/1999	CARBON	✓	✓	615	696	390	890	450	395	470	425	490	5	5,8	W	
PROTOTIPO	HA/745															
FIA 8855/1999	CARBON	✓	✓	530	520	440	790	385	380	480	360	450	5	6,1	W	
HTE-R	HA/772E															
FIA 8855/1999	FIBERGLASS	✓	✓	560	570	515	880	420	390	490	315	510	5	9.4	W	
HTE-R 400	HA/780E															
FIA 8855/1999	FIBERGLASS	✓	✓	560	570	515	880	420	390	490	310	420	5	10.2	W	
HTE-R XL	HA/771E															
FIA 8855/1999	FIBERGLASS	✓	✓	580	610	530	920	440	415	550	305	485	5	10.5	W	
HTE-R CARBON	HA/768E															
FIA 8855/1999	CARBON	✓	✓	545	560	465	880	390	370	470	330	490	5	6.6	W	
HTE-R CARBON XL	HA/779E															
FIA 8855/1999	CARBON	✓	✓	560	580	485	890	425	390	490	330	490	5	6.8	W	

HOMOLOGATION	SHELL	AIRTEX® MATERIAL	CUSHIONS SPLIT LEG	MEASURE IN MM											HARNESS SLOTS	WEIGHT* (KG)	FIXING	
				A	B	C	D	E	F	G	H	I						
WRC-R HA/773E																		
FIA 8855/1999	FIBERGLASS	✓	✓	620	600	510	890	410	390	480	/	/	5	8.8	W			
WRC-R CARBON HA/769E																		
FIA 8855/1999	CARBON	✓	✓	590	600	495	890	400	365	490	/	/	5	5.6	W			
WRC-R XL HA/778E																		
FIA 8855/1999	FIBERGLASS	✓	✓	665	600	520	920	430	415	480	/	/	5	10.7	W			
ARS-R HA/774E																		
FIA 8855/1999	FIBERGLASS	✓		590	600	500	910	395	370	490	/	/	5	8.9	W			
ARS-R CARBON HA/770E																		
FIA 8855/1999	CARBON	✓		585	600	480	890	380	360	490	/	/	5	5.8	W			
RS-PT. 2 HA/762E																		
FIA 8855/1999	FIBERGLASS			565	560	510	880	420	395	480	340	510	5	10.4	W			
CHAMP-R HA/766E																		
FIA 8855/1999	FIBERGLASS			590	575	520	890	400	360	480	/	/	5	8.8	W			
TRS-E PLUS HA/744E																		
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	5	10.3	W Y	  		
TRS-E SKY HA/760E																		
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	5	10.8	W Y			
TRS-E HA/741E																		
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	5	10.3	W Y	  		
TRS-E XS HA/783E																		
FIA 8855/1999	TUBULAR STEEL			520	600	420	870	395	330	470	/	/	5	10.2	W Y			
TRS-E XL HA/781E																		
FIA 8855/1999	TUBULAR STEEL			625	680	540	950	450	415	520	/	/	5	12.3	W			
FIRST-R HA/790																		
FIA 8855/1999	FIBERGLASS			620	600	510	890	410	390	480	/	/	5	8.9	W			
TRS LEGEND HA/775 (PAG. 196)																		
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	5	10.8	W Y			